

**NUMERIC SYSTEMS  
USED IN  
NETWORKING**

# Decimal - Binary - Hexadecimal Table

Decimal	Binary	Hexadecimal
0	00000000	00
1	00000001	01
2	00000010	02
3	00000011	03
4	00000100	04
5	00000101	05
6	00000110	06
7	00000111	07
8	00001000	08
9	00001001	09
10	00001010	0A
11	00001011	0B
12	00001100	0C
13	00001101	0D
14	00001110	0E
15	00001111	0F
16	00010000	10
32	00100000	20
64	01000000	40
128	10000000	80
255	11111111	FF

# ASCII Code

Keyboard	Binary Codes
A	01000001
B	01000010
C	01000011
D	01000100
E	01000101
F	01000110
G	01000111
H	01001000

128	64	32	16	8	4	2	1
-----	----	----	----	---	---	---	---

The Letter A

0	1	0	0	0	0	0	1
---	---	---	---	---	---	---	---

# Data Units

Units	Definition	Bytes*	Bits*	Examples
Bit (b)	Binary digit, a 1 or 0	1	1	On/Off; Open/Closed +5 Volts or 0 Volts
Byte (B)	8 bits	1	8	Represent the letter "X" as ASCII code
Kilobyte (KB)	1 kilobyte = 1024 bytes	1000	8,000	Typical Email = 2 KB 10-page report = 10 KB Early PCs = 64 KB of RAM
Megabyte (MB)	1 megabyte = 1024 kilobytes = 1,048,576 bytes	1 million	8 million	Floppy disks = 1.44 MB Typical RAM = 32 MBCDROM = 650 MB
Gigabyte (GB)	1 gigabyte = 1024 megabytes = 1,073741,824 bytes	1 billion	8 billion	Typical Hard Drive = 40 GB or greater
Terabyte (TB)	1 terabyte = 1024 gigabytes = 1,099,511,627,778 bytes	1 trillion	8 trillion	Amount of data theoret- ically transmittable in optical fiber in one second

\* Common or approximate bytes or bits

# Base 10 Numbering System

Place Value	$\overline{1000}$ $\overline{100}$ $\overline{10}$ $\overline{1}$
Base <sup>Exponent</sup>	$10^3 = 1000$ $10^2 = 100$ $10^1 = 10$ $10^0 = 1$
Number of Symbols	10
Symbols	0, 1, 2, 3, 4, 5, 6, 7, 8, 9
Rationale	Typical number of fingers equals ten

# Base 2 Numbering System

Place Value	<u>128</u>	<u>64</u>	<u>32</u>	<u>16</u>	<u>8</u>	<u>4</u>	<u>2</u>	<u>1</u>
Base <sup>Exponent</sup>	$2^7 = 128$		$2^3 = 8$					
	$2^6 = 64$		$2^2 = 4$					
	$2^5 = 32$		$2^1 = 2$					
	$2^4 = 16$		$2^0 = 1$					
Number of Symbols	2							
Symbols	0, 1							
Rationale	Two-state (discrete binary) voltage systems made from transistors can be diverse, powerful, inexpensive, tiny and relatively immune to noise.							

# Decimal to Binary Conversion

<b>128</b>	<b>64</b>	<b>32</b>	<b>16</b>	<b>8</b>	<b>4</b>	<b>2</b>	<b>1</b>
------------	-----------	-----------	-----------	----------	----------	----------	----------

<b>Number</b>	<b>Divide</b>	<b>Result</b>	<b>Remainder</b>
192	<b><i>/ 2 =</i></b>	96	0
96	<b><i>/ 2 =</i></b>	48	0
48	<b><i>/ 2 =</i></b>	24	0
24	<b><i>/ 2 =</i></b>	12	0
12	<b><i>/ 2 =</i></b>	6	0
6	<b><i>/ 2 =</i></b>	3	0
3	<b><i>/ 2 =</i></b>	1	1
1	<b><i>/ 2 =</i></b>	0	1






# Dotted Decimal Notation

<b>Binary</b>	11001000		01110010		00000110		00110011
<b>Decimal</b>	200	.	114	.	6	.	51
	number	dot	number	dot	number	dot	number


## IP Address Classes

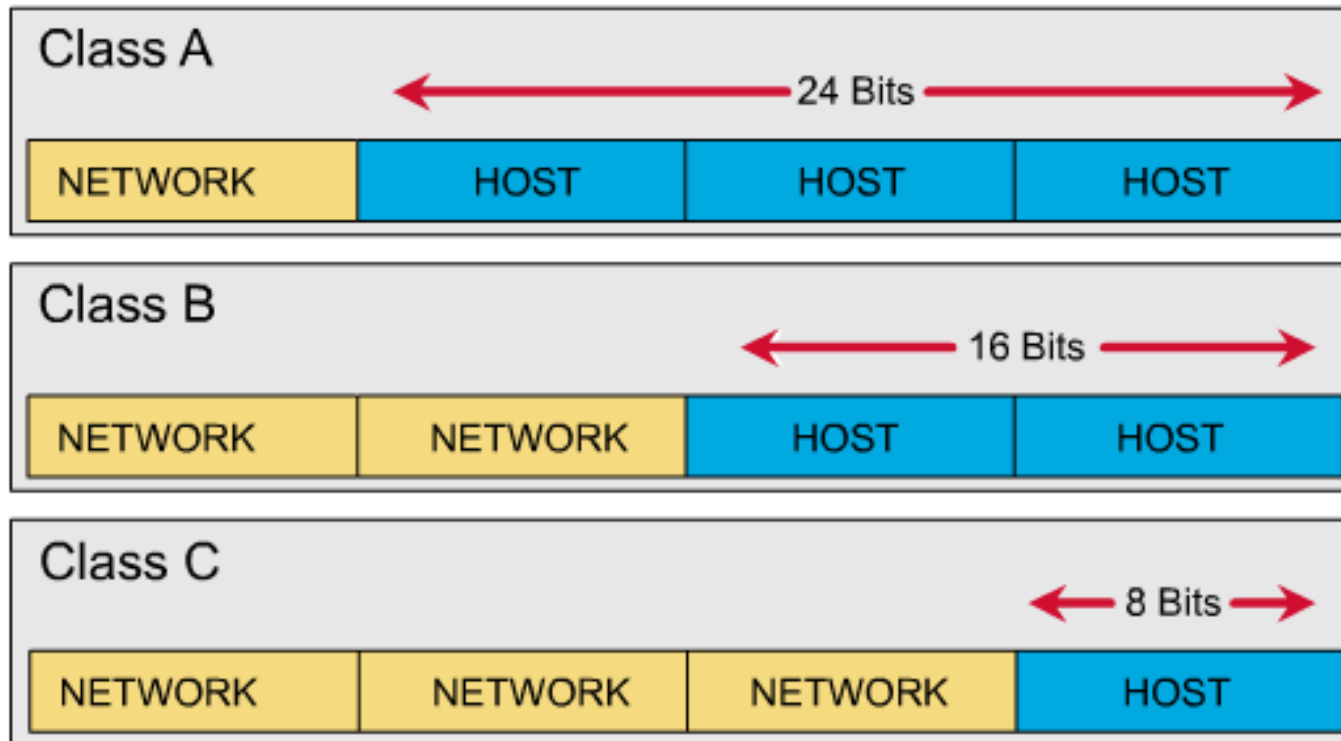

---

Class "C" is the final commercial class of addresses. With eight bits for the host address, only two hundred fifty four hosts are allowed. Most smaller organizations use a class "C" or several class "C" addresses. As you'll see later, two addresses are always reserved: one for the network, and one for the broadcast address.

## IP Address Classes

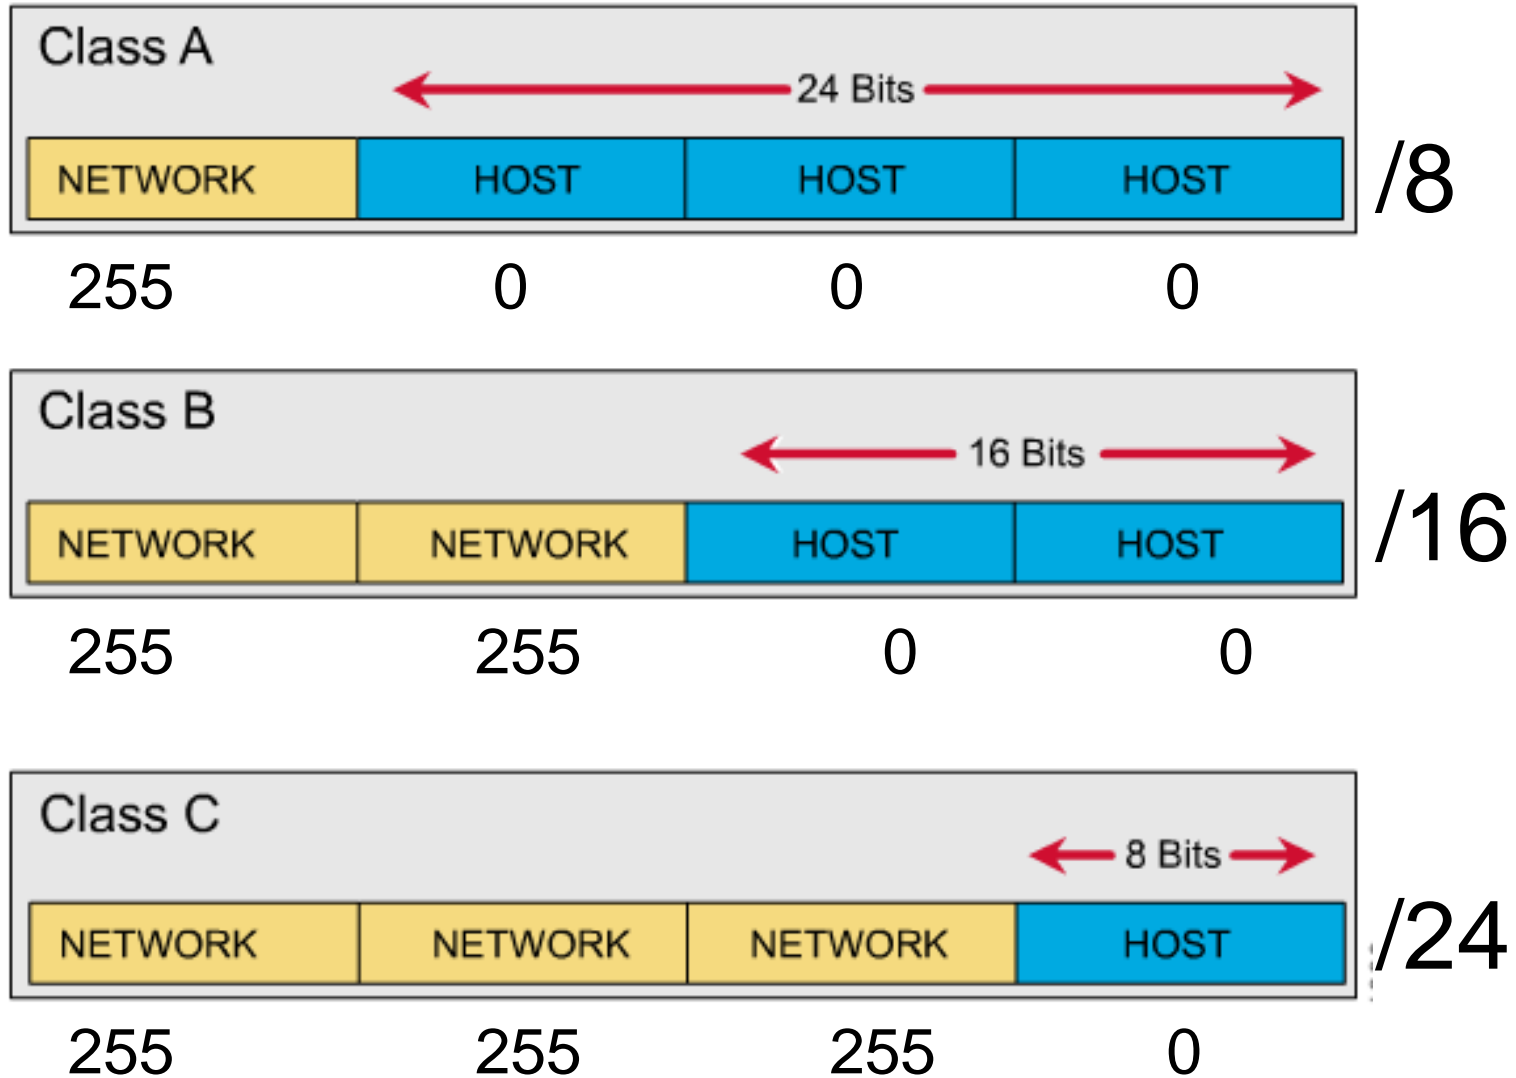


# Address Classes


Cls	1st Octet Decimal Range	1st Octet High Order Bits	Network / Host ID (N=Network, H=Host)	Default Subnet Mask	Number of Networks	Hosts per Network (usable addresses)
A	1 – 126*	0	N.H.H.H	255.0.0.0	126 ( $2^7 - 2$ )	16,777,214 ( $2^{24} - 2$ )
B	128 – 191	1 0	N.N.H.H	255.255.0.0	16,382 ( $2^{14} - 2$ )	65,534 ( $2^{16} - 2$ )
C	192 – 223	1 1 0	N.N.N.H	255.255.255.0	2,097,150 ( $2^{21} - 2$ )	254 ( $2^8 - 2$ )
D	224 – 239	1 1 1 0	Reserved for Multicasting			
E	240 – 254	1 1 1 1 0	Experimental, used for research			

# Binary to Decimal Conversion

## IP Address Classes

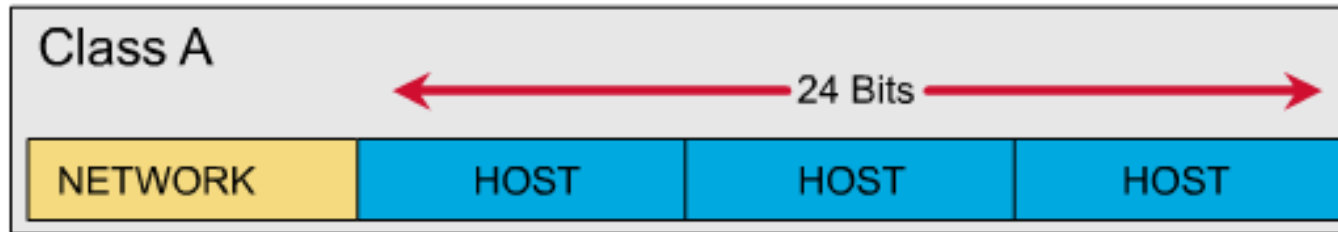


126.10.15.0




128	64	32	16	8	4	2	1
0	1	1	1	1	1	1	1

# Binary to Decimal Conversion

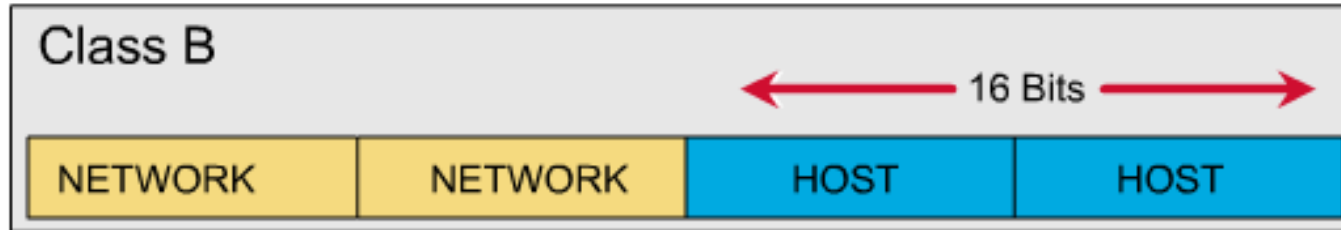


171.10.15.0




128	64	32	16	8	4	2	1
1	0	1	0	1	0	1	1

# Binary to Decimal Conversion

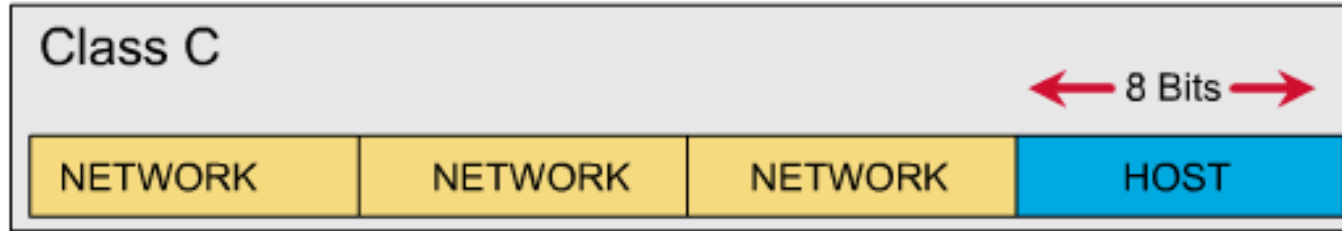

192.10.15.0



128	64	32	16	8	4	2	1
1	1	0	0	0	0	0	0

# IP First Octet Address Ranges

High Order Bits	Octet in Decimal	Address Class
0	0 - 127	A
10	128 - 191	B
110	192 - 223	C



# HEXIDECIMAL

## Base 16 (Hexadecimal) System

Place Value	<u>        </u> <u>        </u> <u>        </u> <u>        </u> 4096's 256's 16's 1's
Base Exponent	$16^3 = 4096$ $16^2 = 256$ $16^1 = 16$ $16^0 = 1$
Number of Symbols	16
Symbols	0, 1, 2, 3, 4, 5, 6, 7, 8, 9 A(=10), B(=11), C(=12), D(=13), E(=14), F(=15)
Rationale	Useful for computer engineering and programming purposes.

**Hexadecimal is a *Base 16* numbering system**

**Hexadecimal is a *Base 16* numbering system that is used to represent MAC addresses.**

**It is referred to as Base 16 because it uses sixteen symbols;**

**combinations of these symbols can then represent all possible numbers.**

**Since there are only ten symbols that represent digits (0, 1, 2, 3, 4, 5, 6, 7, 8, 9), and the Base 16 requires six more symbols,**

**the extra symbols are the letters A, B, C, D, E, and F.**

The position of each symbol, or digit, in a hex number represents the base number 16 raised to a power, or exponent, based on its position.

Moving from right to left, the first position represents  $16^0$ , or 1;

the second position represents  $16^1$ , or 16;

the third position,  $16^2$ , or 256; and so on.

**Example:**

$$4F6A = (4 \times 16^3) + (F[15] \times 16^2) + (6 \times 16^1) + (A[10] \times 16^0) = 20330 \text{ (decimal)}$$

# Convert Hex to Decimal

**Example:**

**4F6A =**

**(4 x 16<sup>3</sup>)**

**+ (F[15] x 16<sup>2</sup>)**

**+ (6 x 16<sup>1</sup>)**

**+ (A[10] x 16<sup>0</sup>)**

**= 20330 (decimal)**

**Only need 4 Hex positions:**

**4096 256 16 1**

# Convert hex 3F4B to a Decimal

(Work right to left)

<b>3</b>	<b>x</b>	<b>4096</b>	<b>=12288</b>
<b>F</b>	<b>x</b>	<b>256</b>	<b>=3840</b>
<b>4</b>	<b>x</b>	<b>16</b>	<b>=64</b>
<b>B</b>	<b>x</b>	<b>1</b>	<b>=11</b>
			<b>=16203</b>

## Convert Decimal to Hex

**Convert the decimal number 24032 to hex**

<b>24032</b>	<b>/16</b>	<b>= 1502</b>	<b>0</b>
<b>1502</b>	<b>/16</b>	<b>= 93</b>	<b>14 or E</b>
<b>93</b>	<b>/16</b>	<b>= 5</b>	<b>13 or D</b>
<b>5</b>	<b>/16</b>	<b>= 0</b>	<b>5</b>

By collecting all the remainders backward, you have the hex number 5DE0

# Binary and Hexadecimal System

Binary	Hexadecimal	Binary	Hexadecimal
0000	0	1000	8
0001	1	1001	9
0010	2	1010	A
0011	3	1011	B
0100	4	1100	C
0101	5	1101	D
0110	6	1110	E
0111	7	1111	F

**Only need 4 Hex positions:**

**4096   256   16   1**



# Converting Binary to Hexadecimal

## Converting Binary Number to Hexadecimal Number

100100100010111110111110111001001

**Converts to:**

0001 0010 0100 0101 1111 0111 1101 1100 1001

**Converts to:**

1 2 4 5 F 7 D C 9

**So:**

100100100010111110111110111001001 binary  
= 1245F7DC9 hexadecimal

## Converting Hexadecimal Number to Binary Number

0x2102

**Converts to:**

2     1     0     2  
0010 0001 0000 0010

**So:**

2102 hexadecimal converts to: 0010 0001 0000 0010 binary

# Decimal-Binary-Hexidecimal

Dec	Bin	Hex
0	00000000	00
1	00000001	01
2	00000010	02
3	00000011	03
4	00000100	04
5	00000101	05
6	00000110	06
7	00000111	07
8	00001000	08
9	00001001	09
10	00001010	0A
11	00001011	0B
12	00001100	0C
13	00001101	0D
14	00001110	0E
15	00001111	0F
16	00010000	10
32	00100000	20
64	01000000	40
128	10000000	80
255	11111111	FF

**In this course,**

**the largest decimal number you have to deal with is 255;**

**the longest binary number you have to deal with is 8 bits (11111111); and**

**the largest hexadecimal number is 2 hex digits (FF**

# *SUBNETTING*

# Subnetting Rules

**YOU MUST BORROW AT LEAST 2 BITS**

**YOU MUST LEAVE AT LEAST 2 BITS**

**YOU MUST BORROW 2 MORE BITS THAN YOU NEED**

**YOU CAN ONLY BORROW FROM THE HOST BITS**

**A** NNNNNNNN.HHHHHHHH.HHHHHHHH.HHHHHHHH

**B** NNNNNNNN.NNNNNNNN.HHHHHHHH.HHHHHHHH

**C** NNNNNNNN.NNNNNNNN.NNNNNNNN.HHHHHHHH


0	0 - 127	A
10	128 - 191	B
110	192 - 223	C

# Borrowing Bits

**11111111.11111111.11111111.00000000/27**


**SUBNET MASK 255.255.255.224**

*Borrowing 3  
Bits will  
give me 8  
subnets*

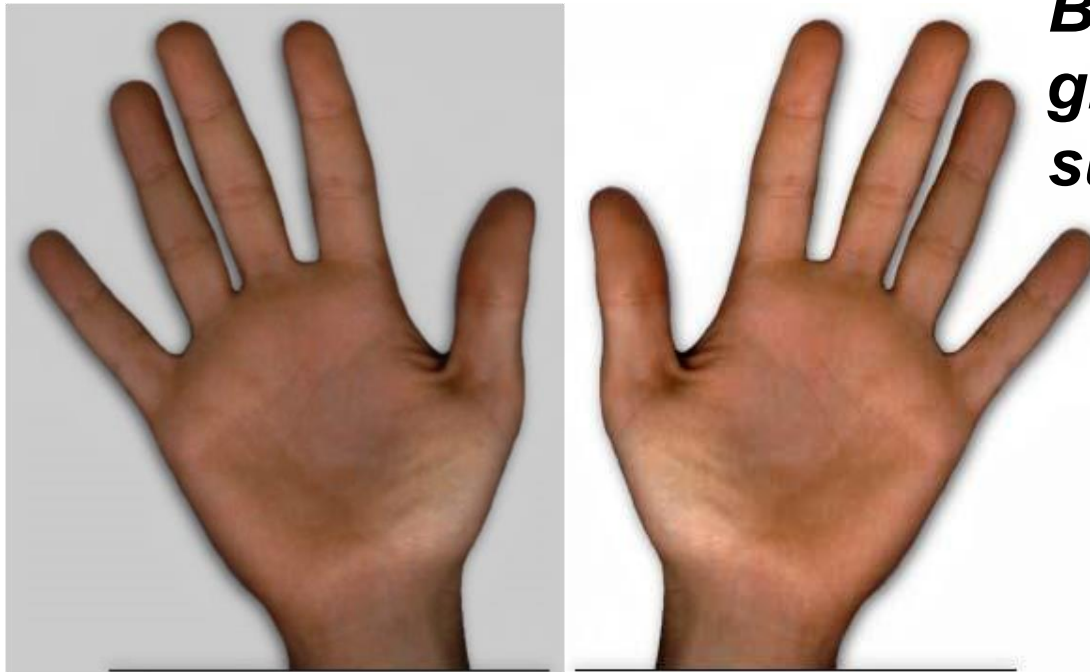

# First Subnet Exercise

**201.20.20.0**

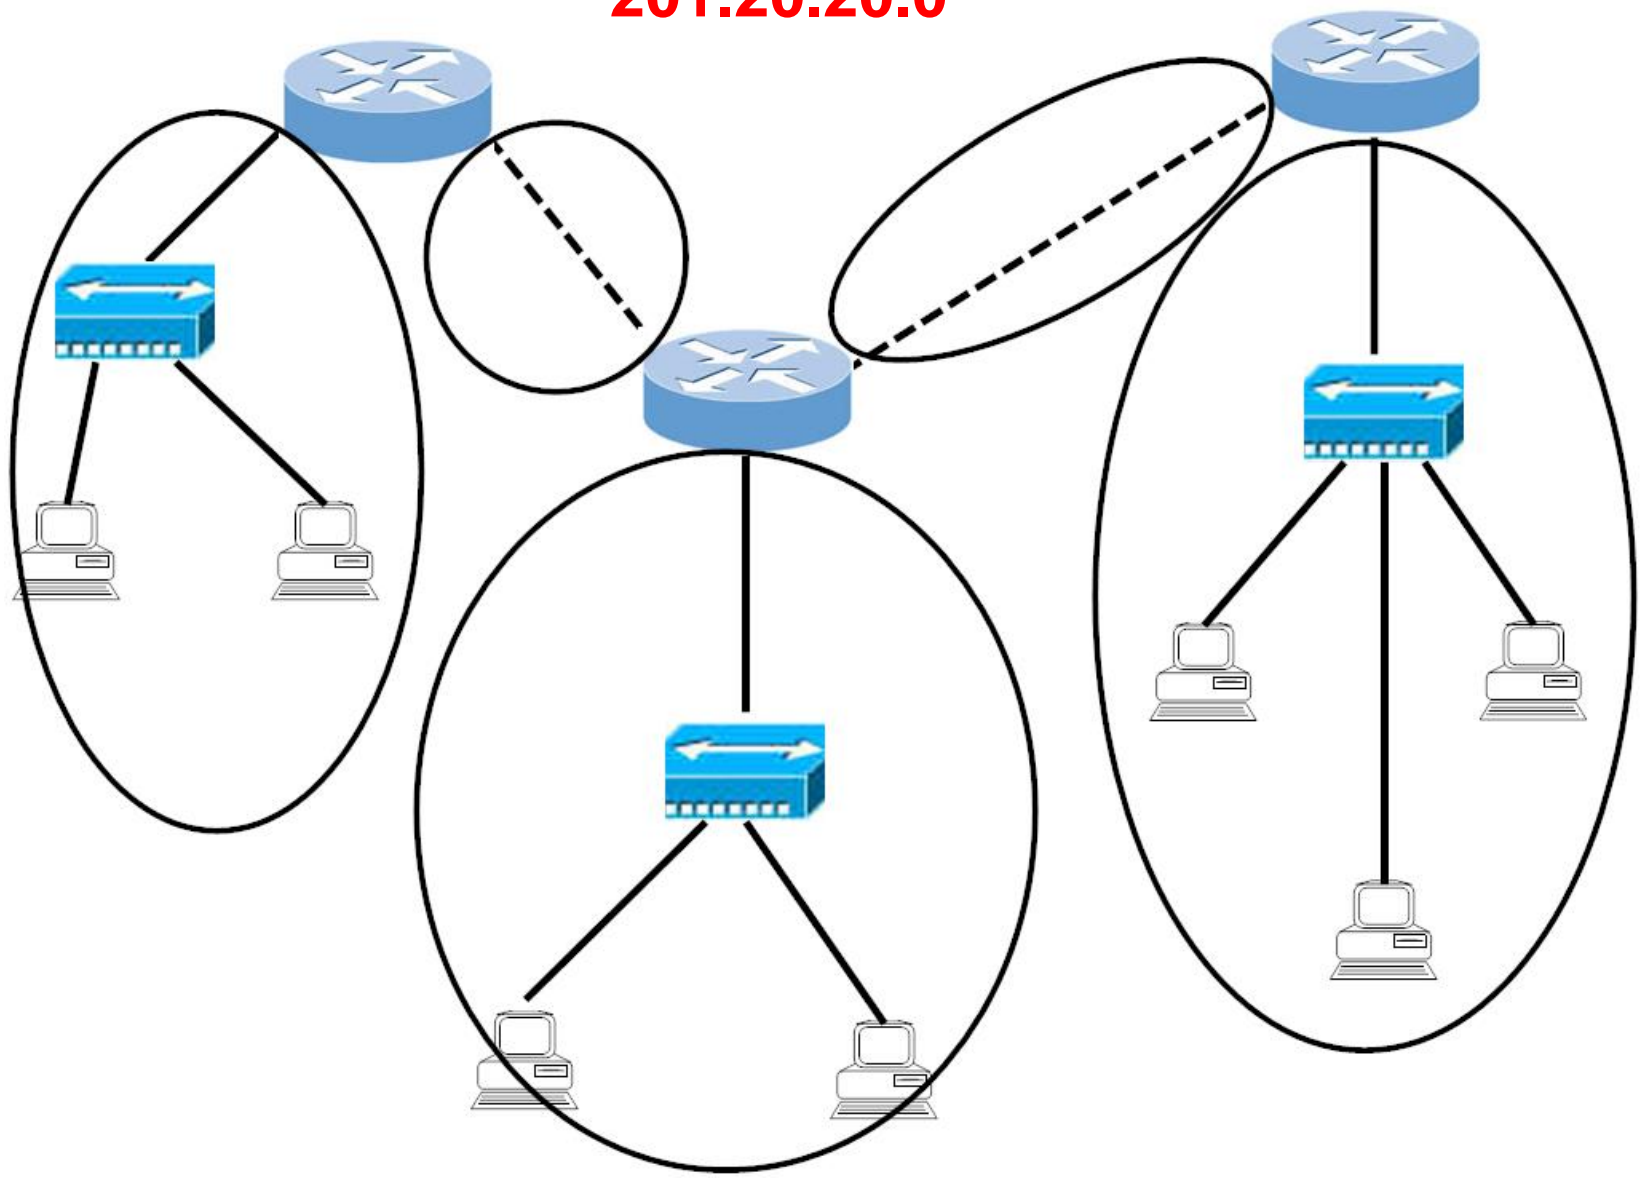

# Subnet Cheat Sheet

What class address	
How many subnets do you need	
How many bits do you have to borrow	
Add the bits you borrowed to find the subnet mask $128 + 64 + 32 + 16 + 8 + 4 + 2 + 1$	
How many bits are left for host addresses	
Count host bits to find number of hosts <b>per subnet</b> 128 64 32 16 8 4 2 1	





**201.20.20.0**

**201.20.20.32**

**201.20.20.64**


**201.20.20.96**

**201.20.20.160**

**201.20.20.128**

**IP 201.20.20.0**  
**Subnet with least**  
**number of borrowed**  
**bits**

**Subnet Mask 255.255.255.224**

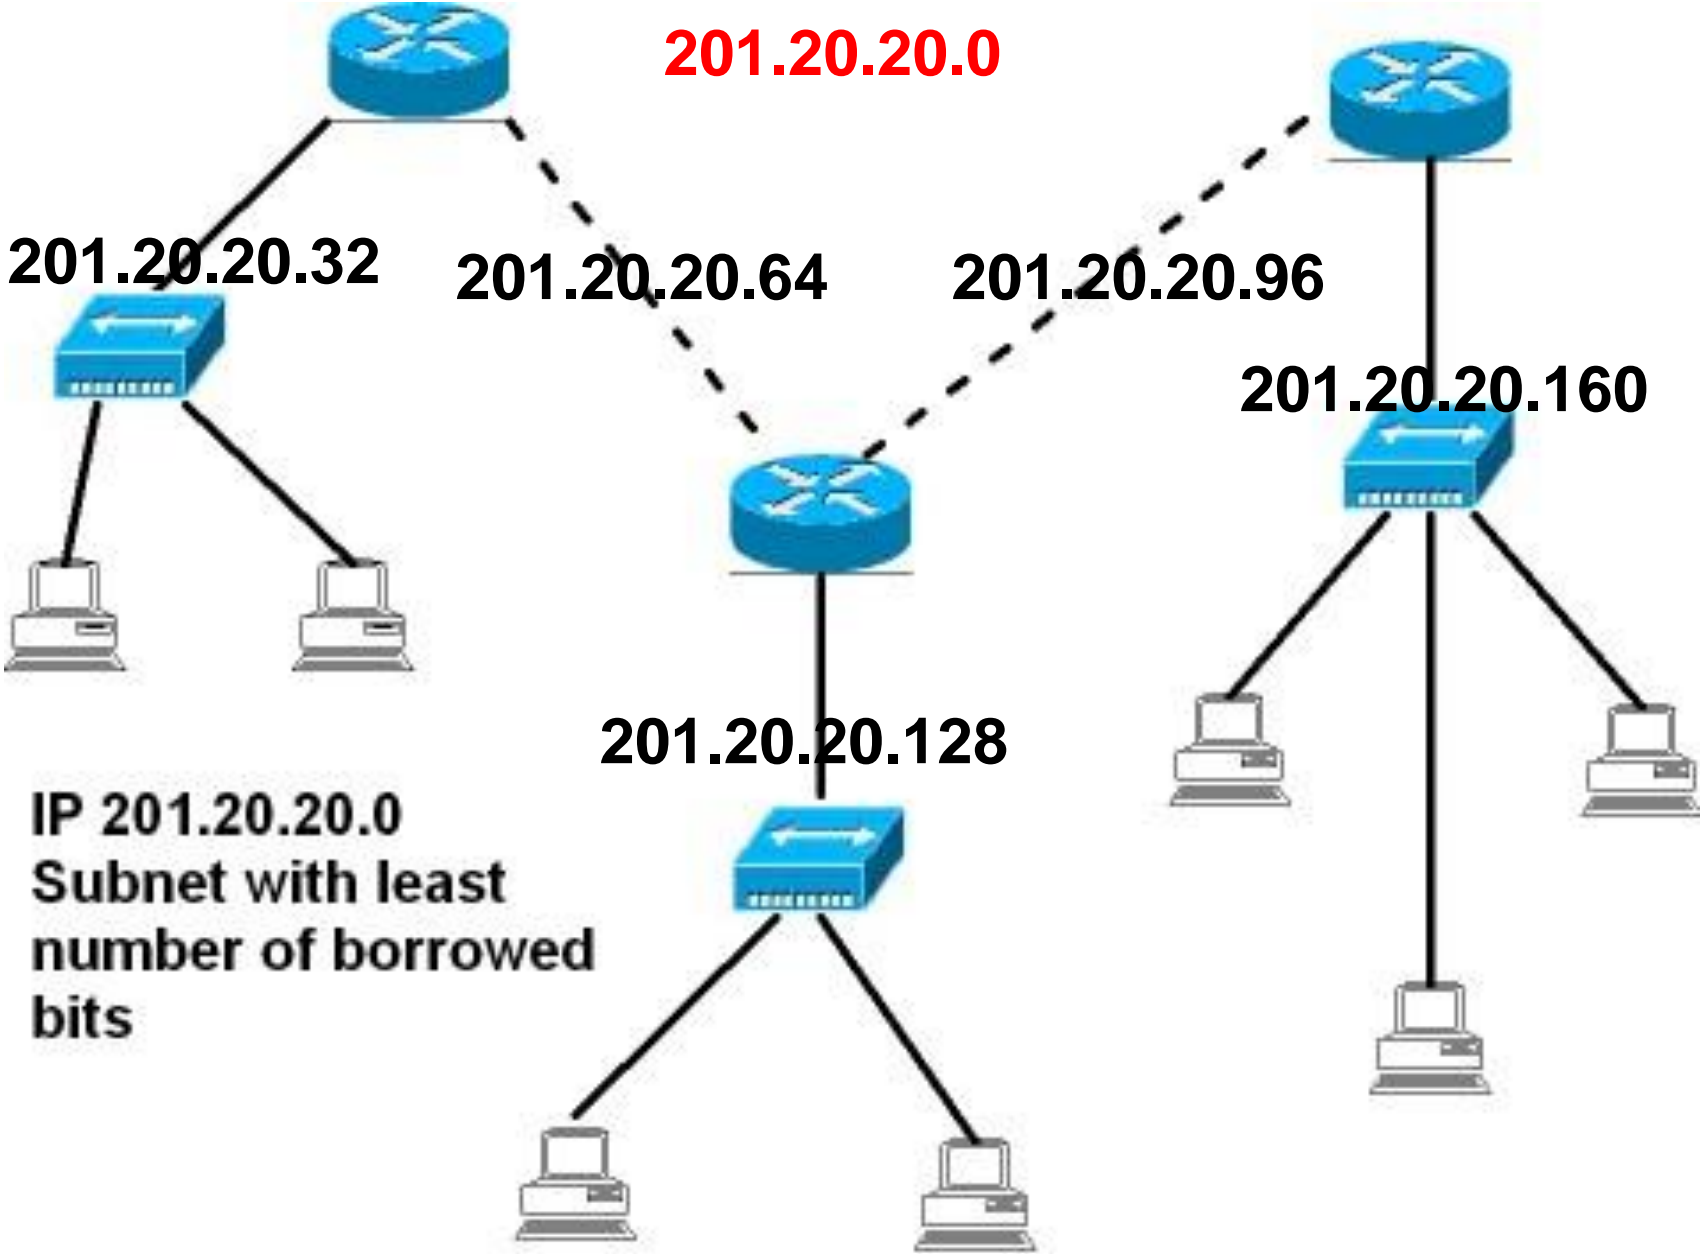

# **CLASS B SUBNETTING**

159.15.0.0

10100000.00001111.0.0

Borrow 6

10100000.00001111.11111100.00000000

255.255.252.0

1024 addresses

You have an address of 185.15.0.0

You need 250 networks

You need 250 hosts

**11111111.11111111.11111111.00000000/24**

**SUBNET 0**

185.15.0.0

185.15.0.1

185.15.0.2

185.15.0.3

185.15.0.1

185.15.0.5

185.15.0.~ 255

**SUBNET 1**

185.15.1.0

185.15.1.1

185.15.1.2

185.15.1.3

185.15.1.4

185.15.1.5

185.15.1.~ 255

**SUBNET 2**

185.15.2.0

185.15.2.1

185.15.2.2

185.15.2.3

185.15.2.1

185.15.2.5

185.15.2.~ 255

**The last address will be 185.15.255.255**

You have an address of 185.15.0.0

You need at least 60 subnets

You need at least 1000 hosts

**11111111.11111111.11111100.00000000/22**

### **Subnet 0**

185.15.0.0 to 255

185.15.1.0 to 255

185.15.2.0 to 255

185.15.3.0 to 255

### **Subnet 2**

185.15.8.0 to 255

185.15.9.0 to 255

185.15.10.0 to 255

185.15.11.0 to 255

### **Subnet 1**

185.15.4.0 to 255

185.15.5.0 to 255

185.15.6.0 to 255

185.15.7.0 to 255

### **Subnet 3**

185.15.12.0 to 255

185.15.13.0 to 255

185.15.14.0 to 255

185.15.15.0 to 255

**The last address will be 185.15.255.255**

You have an address of 185.15.0.0

You need at least 30 subnets

You need at least 2000 hosts

**11111111.11111111.1111000.00000000/21**

### Subnet 0

185.15.0.0 to 255

185.15.1.0 to 255

185.15.2.0 to 255

185.15.3.0 to 255

185.15.4.0 to 255

185.15.5.0 to 255

185.15.6.0 to 255

185.15.7.0 to 255

### Subnet 1

185.15.8.0 to 255

185.15.9.0 to 255

185.15.10.0 to 255

185.15.11.0 to 255

185.15.12.0 to 255

185.15.13.0 to 255

185.15.14.0 to 255

185.15.15.0 to 255

### Subnet 2

185.15.16.0 to 255

185.15.17.0 to 255

185.15.18.0 to 255

185.15.19.0 to 255

185.15.20.0 to 255

185.15.21.0 to 255

185.15.22.0 to 255

185.15.23.0 to 255

**The last address will be 185.15.255.255**

You have an address of 185.15.0.0

You need **at least** 10 subnets

You need **at least** 4000 hosts

**11111111.11111111.11110000.00000000/20**

### Subnet 0

185.15.0.0 to 255

185.15.1.0 to 255

185.15.2.0 to 255

185.15.3.0 to 255

185.15.4.0 to 255

185.15.5.0 to 255

185.15.6.0 to 255

185.15.7.0 to 255

### Subnet 0

185.15.8.0 to 255

185.15.9.0 to 255

185.15.10.0 to 255

185.15.11.0 to 255

185.15.12.0 to 255

185.15.13.0 to 255

185.15.14.0 to 255

185.15.15.0 to 255

**The last address will be 185.15.255.255**



You have an address of 185.15.0.0

You need **at least** 10 subnets

You need **at least** 4000 hosts

**11111111.11111111.11110000.00000000/20**

### Subnet 1

185.15.16.0 to 255

185.15.17.0 to 255

185.15.18.0 to 255

185.15.19.0 to 255

185.15.20.0 to 255

185.15.21.0 to 255

185.15.22.0 to 255

185.15.23.0 to 255

### Subnet 1

185.15.24.0 to 255

185.15.25.0 to 255

185.15.26.0 to 255

185.15.27.0 to 255

185.15.28.0 to 255

185.15.29.0 to 255

185.15.30.0 to 255

185.15.31.0 to 255

**The last address will be 185.15.255.255**

You have an address of 185.15.0.0

You need **at least** 10 subnets

You need **at least** 4000 hosts

**11111111.11111111.11110000.00000000/20**

### Subnet 2

185.15.32.0 to 255

185.15.33.0 to 255

185.15.34.0 to 255

185.15.35.0 to 255

185.15.36.0 to 255

185.15.37.0 to 255

185.15.38.0 to 255

185.15.39.0 to 255

### Subnet 2

185.15.40.0 to 255

185.15.41.0 to 255

185.15.42.0 to 255

185.15.43.0 to 255

185.15.44.0 to 255

185.15.45.0 to 255

185.15.46.0 to 255

185.15.47.0 to 255

**The last address will be 185.15.255.255**

You have an address of 185.15.0.0

You need 250 networks

You need 250 hosts

**11111111.11111111.11111111.00000000/24**

**SUBNET 0**

185.15.0.0

185.15.0.1

185.15.0.2

185.15.0.3

185.15.0.1

185.15.0.5

185.15.0.~ 255

**SUBNET 1**

185.15.1.0

185.15.1.1

185.15.1.2

185.15.1.3

185.15.1.4

185.15.1.5

185.15.1.~ 255

**SUBNET 2**

185.15.2.0

185.15.2.1

185.15.2.2

185.15.2.3

185.15.2.1

185.15.2.5

185.15.2.~ 255

**The last address will be 185.15.255.255**



















